
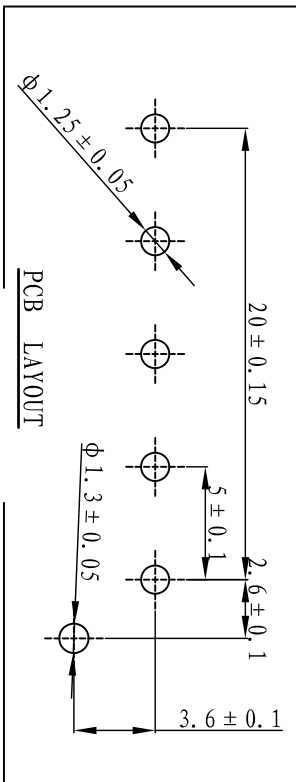
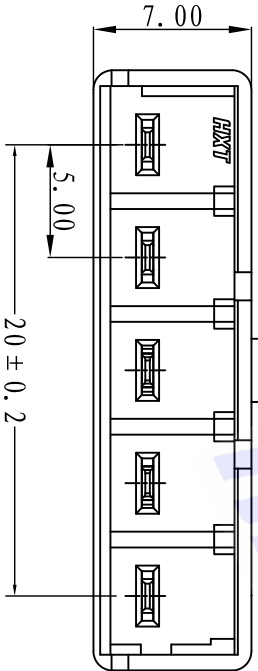
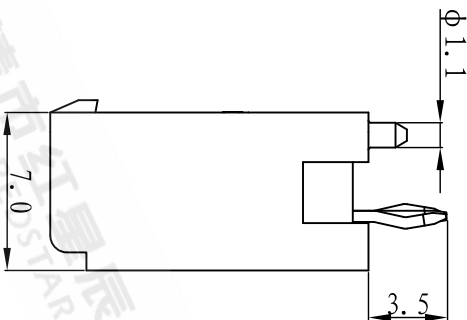


客户图

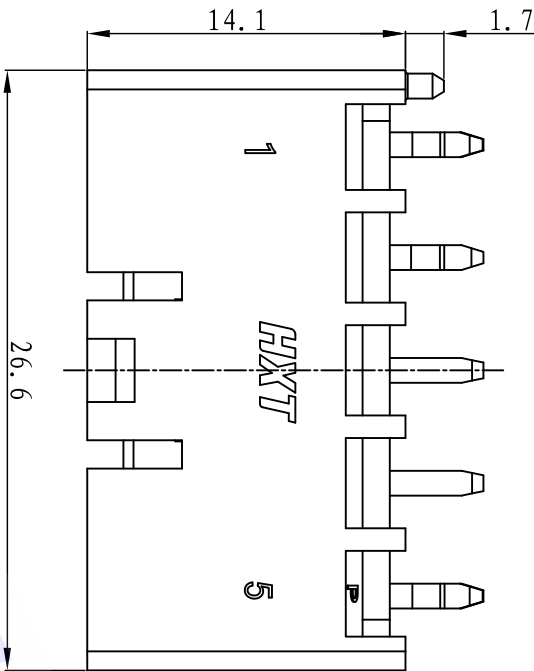

- NOTE:
1. 材质: PA66+GF, 颜色: 本色; UL94V-0.
 2. 外观要求事项.
不能有缩水、起泡、翘曲变形、脏污、不能有刮伤、划伤、压痕、拉料、不饱模.
 3. 适配塑壳: 50014-05Y-***.
铜针固定力: 15N/PIN Min.
 4. 未注尺寸公差见一般公差表.
 5. 料号注解:

50014-***A-***

PIN数
05: 05PIN
T: 亮锡
颜色
0: 本色
包装方式
P: PE袋

1. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EU FOR ROHS
2. ALL RIGHTS RESERVED, PRODUCTS ARE COVERED BY PATENSAND/OR PATENTS PENDING

X. ±0.50 X.° ±10°
.X ±0.35 .X° ±5°
.XX ±0.20 .XX° ±3°
.XXX ±0.10 .XXX° ±1°
GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

DRAW. 绘图员
DESIGN. 设计
CHECK. 校阅
APPRO. 承认
吴泽泓 23'/07/31
倪亚宁 23'/07/31
林顺晓 23'/07/31
陈阿国 23'/07/31

E 名称 50014-A针座 (PIN: 05)
料号 PART NO. 50014-05A-T0P
料号 PART NO. (OLD)
档案名称 C
FILE NAME: HXC-50014-A-C
SCALE: 1:1 UNIT: mm A4 SHEET: 1 of 1

HXT® 致财电子有限公司